

MOTORISED SIRENS SIRENCO 500SL




Compact and powerful siren constructed from UV stabilised polycarbonate. Ideal for all signalling or alarm applications where a lightweight motorised siren is required.



VOLTAGE	VOLTAGE
12 VAC/DC	24 VAC/DC
110 VAC/DC	220 VAC/DC

Please visit our website for all the latest information,
www.kama.co.za.

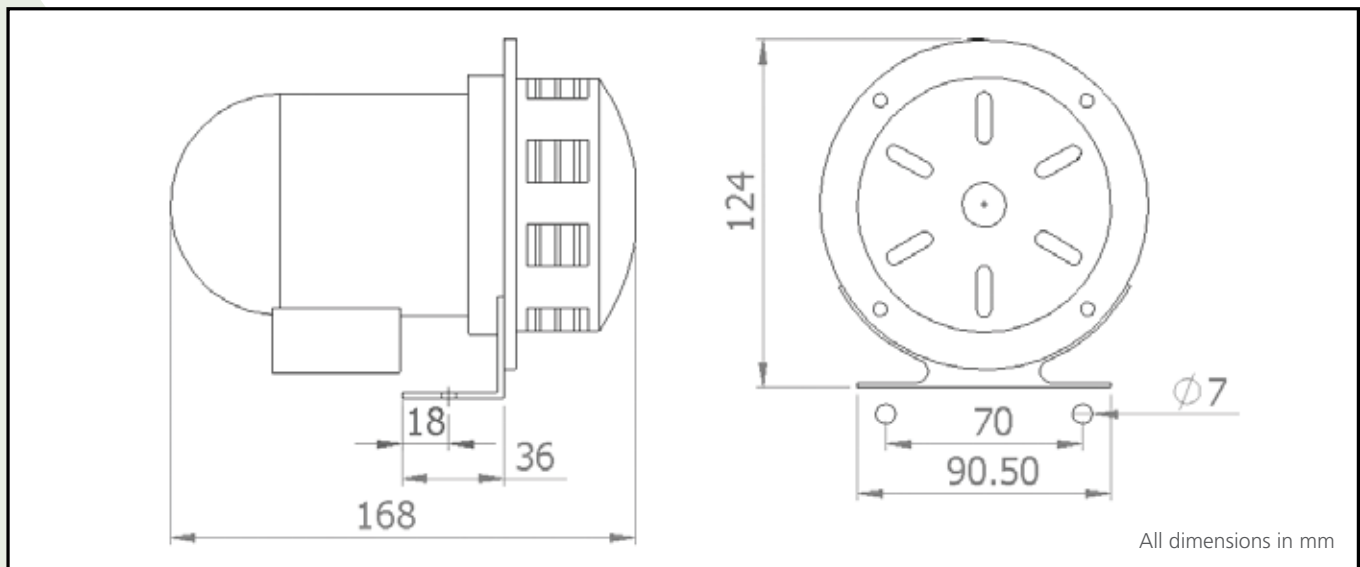

	SPECIFICATIONS			
VOLTAGE	12 Vac/dc	24 Vac/dc	110 Vac/dc	220 Vac/dc
DUTY CYCLE	5min on - 10min off			
SOUND OUTPUT	107 dB(A) at 1m			
SOUND FREQUENCY	1 400Hz			
APP. RANGE	500m in still air on open field			
CURRENT CONSUMPTION*	12V - 10.6A	24V - 7.5A	10V - 1.0A	220V - 0.7A
IP RATING	IP 45			
WEIGHT	1.1kg			
PACKING DIMENSIONS	190x140x155mm			

* Start-up current x 8